


L28 SERIES

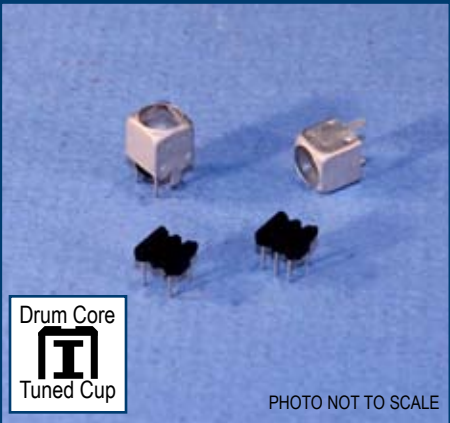


Drum Core Tuned Cup

PHOTO NOT TO SCALE

Toko 5P, 5PG, 5PAG Size 5mm

Inches/[mm]
±.010/[±.25]
2 x size

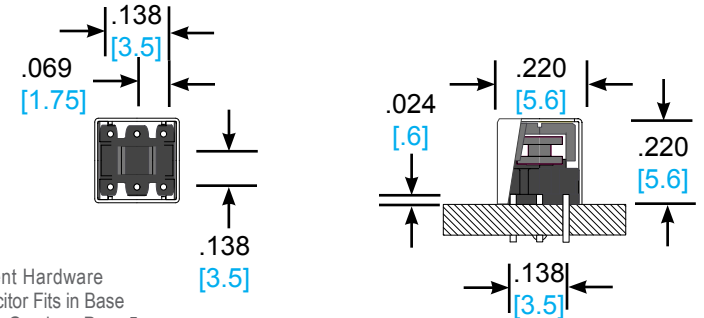

- Toko Equivalent Hardware
- Optional Capacitor Fits in Base
- Q vs Frequency Graph on Page 5
- Winding Capacity Table on Page 6
- Ferrite Tuning Core and Fixed Cup
- Quality Inspection Level: MIL-STD-1916 Level IV
- Available as: Un-wound Hardware or Complete Wound Coils

ROHS COMPLIANT REACH

ASSEMBLY PART NO.	COLOR CODE	MAGNETIC MATERIAL(1)	FREQUENCY RANGE(2)	MATERIAL PERMEABILITY	ASSEMBLY AL nH/turns ² (3)	MAX µH 100 turns	MIN µH (4) 100 turns	TEMPERATURE STABILITY(5)
L28-51-BT-D-5	None	FERRITE 51	.05-2.0 MHz	300	25.7	257	129	1500 ppm/°C
L28-52-BT-D-5	None	FARRITE 52	2-200 MHz	60	24.8	248	124	1500 ppm/°C

1) The ferrite materials are used in the drum core and cup core.
 2) This represents the frequency range for Q optimization in tuned or resonant circuits. The inductive properties of the material is effective over a considerably wider frequency range.
 3) Nanohenries (10⁻⁹ Henries) per turn squared.
 4) The minimum inductance is measured in microhenries (10⁻⁶ Henries) per 100 turns with the tuning core tuned out of the winding area but still a part of the assembly.
 5) The temperature stability is of the magnetic material, measured in parts per million per degree Celsius (ppm/°C) on a toroidal core and winding. This is only an indication of the temperature stability for a complete wound assembly.

Custom Wound Variable Coils

Example Part Number

L28-5P-L-2.0-7.96-BM

L28-5P-C-22-10.7-A

Inductive Application

Inductance (µH)

Test Freq (Mhz)


Winding Style

Capacitive Application

Capacitance (pf)


Self Resonant Freq (Mhz)

Test Frequencies (Mhz): 25.2 (0.1 to 1µH), 7.96 (1µH to 10µH), 2.52 (10 to 100µH), .796 (100µH to 1mH), .252 (1mH to 10mH)

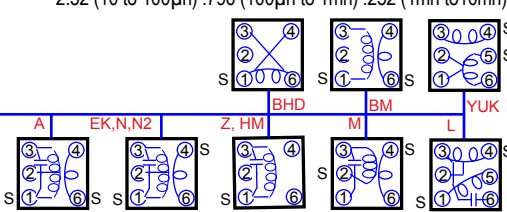

Internal Capacitors (pf): Selected to meet the specified self-resonant frequency

Inductance Range **Frequency Range**




Custom Variable Coils are wound to your Inductance and Frequency Specifications, or with Capacitors to your Self-resonant Frequency Specifications.

Assembly Sub-components

Actual Size

Inches/[mm]
±.010/[±.25]

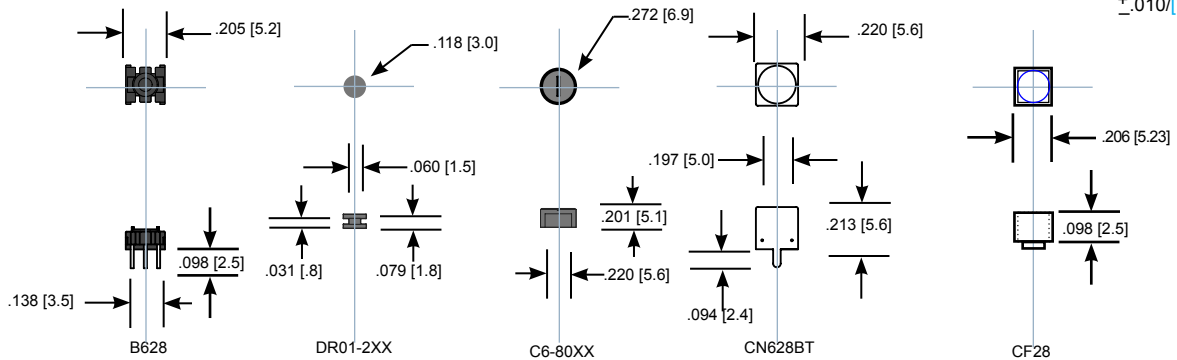

5 TERMINAL ASSEMBLY	BASE with DRUM CORE (6)	COLOR CODE	DRUM CORE (8)	CUP CORE	SHIELD CAN	CAN FORM
L48-51-BT-D-5	B628	None	DR01-251	C6-8051	CN628BT	CF28
L48-52-BT-D-5	B628	None	DR01-252	C6-8052	CN628BT	CF28

6) *The base is molded in a phenolic thermoset. The 5 terminals are brass, .027 inches (0.7mm) in diameter, 100 % tin plated to meet MIL-STD 202 method 208 for solderability.
 7)The ferrite drum core is attached to the thermoset base.
 8) Threaded cup matches the internal threads in the Cup Form. 9) The base has a cavity for an optional capacitor .185 [4.7] Long x .087 [2.2] Wide x .079 [2.0] Deep. Capacitors are not included.