


Core cross reference (x = material variation within a size)




Fair-Rite: 94XX375002	Micrometals: E137-X	Magnetics: XX-43515-EC
Nicera: None	Epos: B66370	MMG: 32-320-XX
Ferroxcube: E375-3XXX	TDK: PCXEE35/28-Z	

Winding Area
(mm²)



LODESTONE PACIFIC
B-EI375H-12-1-GFN7-L-500



TOP

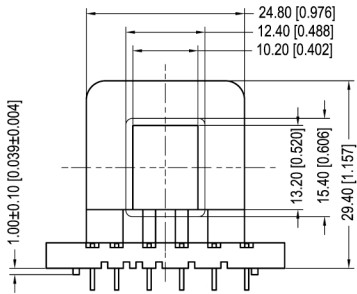

BOTTOM

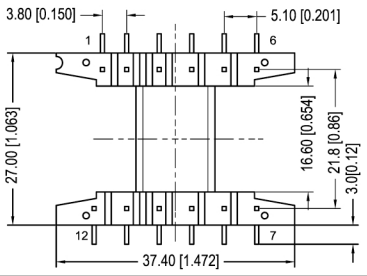

© 2006

	Scale	Tolerance (Inches)	Tolerance (mm)	No. of Terminals	Terminal Plating	Terminal Material	Terminal Type	
	None	.XXX ±.008 .XX ±.012	.XX ±0.20 .X ± 0.30	12	100% Tin	CP Wire	L Type	
<p style="text-align: center;">LODESTONE PACIFIC</p>					Molding Material	UL File No.	Rating	Class
					Nylon	E154352	UL94-HB	B
<p style="text-align: center;">Lodestone's Part Number</p>							Rev.	
<p style="text-align: center;">B-EI375H-12-1-GFN7-L-500</p>							1	

Phone: (714)970-0900. Fax: (714)970-0800
4769 Wesley Drive, Anaheim, California, 92807, USA
Web: www.lodestonepacific.com E-Mail: sales@lodestonepacific.com