


Core cross section (x = material variation within a size)




Fair-Rite: 94**375002	Micrometals: E137-*	Magnetics: *-43515-EC
Nicera: None	Epcos: B66370	MMG: 32-320-**
Ferroxcube: E375-3***	TDK: PC**EE35/28-Z	

Winding Area
(mm²)



LODESTONE PACIFIC
B-EI375H-12-2-GFN7-L-500



TOP

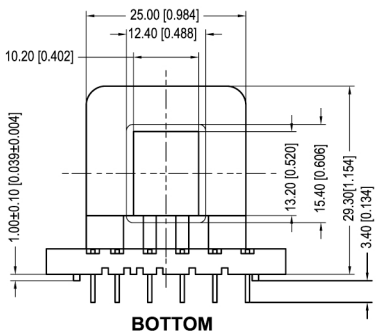

BOTTOM

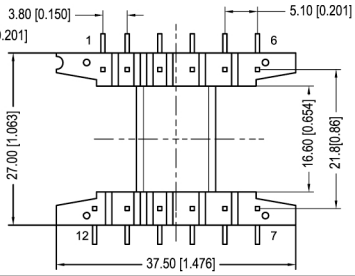

© 2006

	Scale	Tolerance (Inches)	Tolerance (mm)	No. of Terminals	Terminal Plating	Terminal Material	Terminal Type	
	None	.XXX ±.008 .XX ±.012	.XX ±0.20 .X ± 0.30	12	100% Tin	CP Wire	L Type	
<p style="text-align: center;">LODESTONE PACIFIC</p>					Molding Material	UL File No.	Rating	Class
					Nylon	E154352	UL94-HB	B
Lodestone's Part Number							Rev.	
B-EI375H-12-2-GFN7-L-500							1	

Phone:(714)970-0900.Fax:(714)970-0800
4769 Wesley Drive,Anaheim,California,92807.USA
Web:www.lodestonepacific.com E-Mail:sales@lodestonepacific.com