


Core size reference (x = material variation within a size)




Fair-Rite: 94 XX 375002	Micrometals: E137-XX	Magnetics: X-43515-EC
Nicra: None	Epcos: B66370	MMG: 32-320-XX
Ferroxcube: E375-3 XXX	TDK: PC XX EE35/28-Z	

Winding Area  
(mm<sup>2</sup>)



LODESTONE PACIFIC  
**B-EI375H-12-2-PBT**



**TOP**

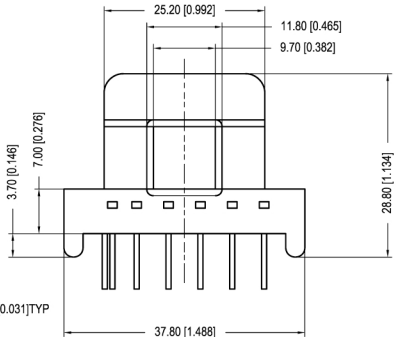

**BOTTOM**



© 2006

	Scale	Tolerance (Inches)	Tolerance (mm)	No. of Terminals	Terminal Plating	Terminal Material	Terminal Type
	None	.XXX ± 0.008 .XX ± .012	.XX ± 0.20 .X ± 0.30	12	100% Tin	CP WIRE	Through Hole
		Molding Material	UL File No.	Rating	Class		
		PBT	E59481	UL94-VO	B		
LoDESTONE's Part Number						Rev.	
<b>B-EI375H-12-2-PBT</b>						<b>1</b>	

Phone: (714) 970-0900. Fax: (714) 970-0800  
 4769 Wesley Drive, Anaheim, California, 92807, USA  
 Web: www.loDESTONEpacific.com E-Mail: sales@loDESTONEpacific.com