

Core cross reference (x = material variation within a size)

Fair-Rite: None	Micrometals: None	Magnetics: XX-42523-EC
Nicra: FEET-25C	Epcos: EFD 25/13/9	MMG: 32-760-XX
Ferroxcube: EFD25-XXX-XXXX-5	TDK: None	


Winding Area  
(mm<sup>2</sup>)

LODESTONE PACIFIC

**SMB-EFD25-10-1-PH**




TOP



13.00±0.10 [0.512±0.004]


11.70±0.10 [0.461±0.004]

12.60±0.10 [0.496±0.004]



1.10 [0.043] x 0.40 [0.016] TYP.

5.50±0.10 [0.217±0.004]  
6.80±0.10 [0.268±0.004]

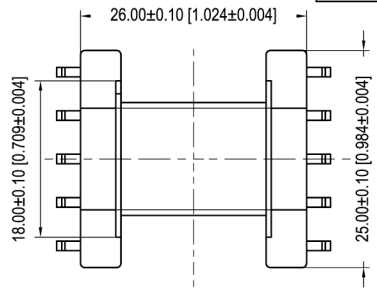


26.00±0.10 [1.024±0.004]

18.00±0.10 [0.709±0.004]

25.00±0.10 [0.984±0.004]

17.90 [0.705]  
16.70 [0.657]



13.00 [0.512] MAX

29.70 [1.169]  
31.50±0.10 [1.240±0.004]

BOTTOM




20.00 [0.787]



5.00 [0.197]

31.50±0.10 [1.240±0.004]



© 2006

	Scale	Tolerance (Inches)	Tolerance (mm)	No. of Terminals	Terminal Plating	Terminal Material	Terminal Type	
	None	.XXX ± .008 .XX ± .012	.XX ± 0.20 X ± 0.30	10	100% Tin	Phosphor Bronze	Surface Mount	
					Molding Material	UL File No.	Rating	Class
					Phenolic	E41429	UL94-VO	N
Phone: (714)970-0900 Fax: (714)970-0800 4769 Wesley Drive, Anaheim, California, 92807, USA Web: www.lodestonepacific.com E-Mail: sales@lodestonepacific.com							Lodestone's Part Number <b>SMB-EFD25-10-1-PH</b>	Rev. <b>1</b>