




Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

STM180-08/295

Material: LCP (Natural)
UL Rating: UL94-VO, Class F
8 Terminals: Self Terminating
Package Method: Bulk in Poly Bags
 See RoHS compliant PVC packaging trays options on page 57.

Application: For surface mounting of toroids with wound diameters up to .190 inches. The toroid leads are tinned, and wrapped around the tabs on the toroid mount. The toroid leads then make a direct connection to the PCB during infrared solder reflow.

Made in our China Factory

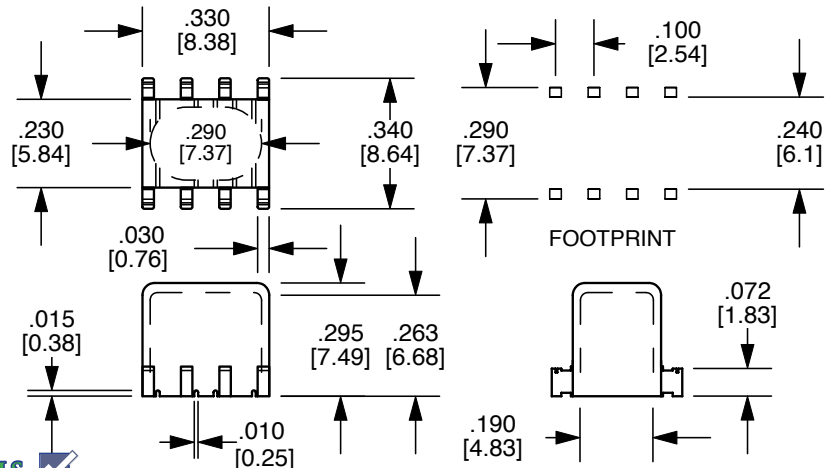

+/- .010 Inches
(mm), 2 x Size

Get Samples
 Request samples and literature and have them ship to you same day.
www.lodestonepacific.com/samplepricing.php

Check Inventory
 View daily updated inventory levels in USA and Hong Kong warehouses.
www.lodestonepacific.com/search.php

Request a Quote
 Request a quote and delivery and have it e-mailed to you same day.
www.lodestonepacific.com/quote.php

Try Me!
Toroid Mount Selector
 Search for a part to match your applications, download the .pdf
www.lodestonepacific.com/selectoroid.php

NEW!
REACH Docs Database
 Search for REACH documents, view or download the certifications .pdf.
www.lodestonepacific.com/reach.php

NEW!
Find a Coil Winder
 Search our Coil Winder Data Base, for capabilities to match your specs.
www.lodestonepacific.com/coilwinders.php