

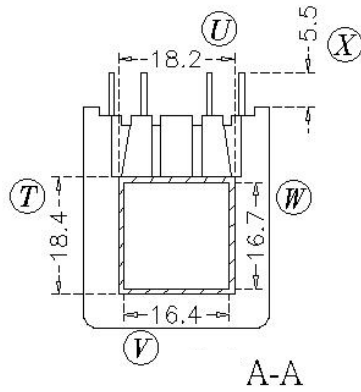

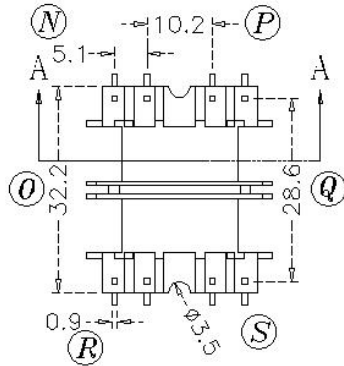


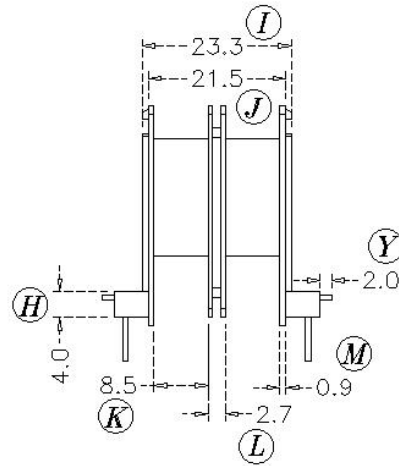

**Core Fit Reference**

<b>0673</b>	<b>TDK:PC**EE47/39-Z</b>	<b>Ferrite Intl:47-21-16</b>	<b>Magnetics:X-44721-EC</b>
<b>Simens:B66383</b>	<b>Fair-Rite:94**625002</b>	<b>Ferroxcube:E625-3***</b>	<b>Micrometals:E187-X</b>

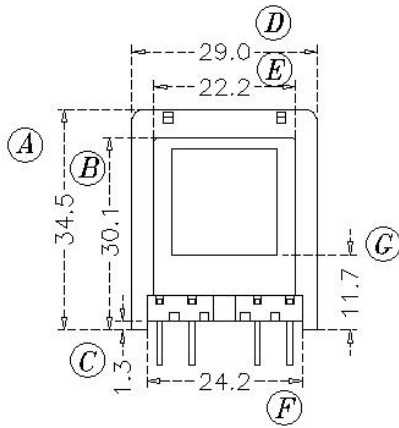

CAN BE USED WITH SHROUD  
BS-EI625H-8-2-PET-L-VDE

Signal P/N: 14A-10R-4B

	<b>Scale</b>	<b>Tolerance (mm)</b>			<b>Terminal Plating</b>	<b>Terminal Material</b>	<b>No of Terminals</b>	
	None	0-4mm +/-0.1	4-16mm +/-0.2	16-60mm +/-0.3	100% Sn	CP Wire	8	
					<b>Molding Material</b>	<b>UL File No.</b>	<b>Rating</b>	<b>Class</b>
					FR530	E41938	UL94-V0	N
					<b>Bobbin Part Number</b>			
<b>B-EI625H-8-2-PET-L-VDE</b>							<b>1</b>	