

VTM1100-06

Material: GFN Natural
UL Rating: UL94-VO, Class F
6 Terminals: CP Wire





.030 (.76mm) square, 100% Tin Plate.

Solderability: Per MIL-STD-202
Method 208

Packaging Tray: Bulk in Polybags

Application: For vertical mounting of
wound toroids up to 1.1 inches in
diameter requiring up to 6 terminations.

Made in our China Factory

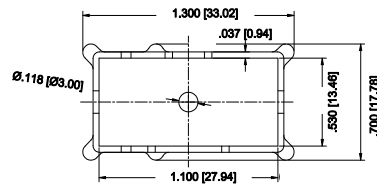

± .010 inches
[mm] [Not to Scale]

NEW