LODESTONE PACIFIC



Phone: (800) 694-8089 www.lodestonepacific.com

E-mail: sales@lodestonepacific.com


STM HC SERIES

Material: PPS (Black)
Rating: UL 94-VO

2 Terminals: Self Terminating **Package Method**: Bulk in Poly Bags See RoHS compliant PVC packaging trays, or tape and reel options on page 57.

Application: The STM HC Series is for self leading surface mount low current inductors. The series will accommodate wound toroidal cores from .500 up to .840 in diameter and uses the toroid's winding leads to surface mount the toroid and case to the printed circuit board. The wound toroid's leads are held in position by the slots and channels incorporated in the mounting case.

This product is the patented property of **Pulse Engineering Inc.**, San Diego, CA.

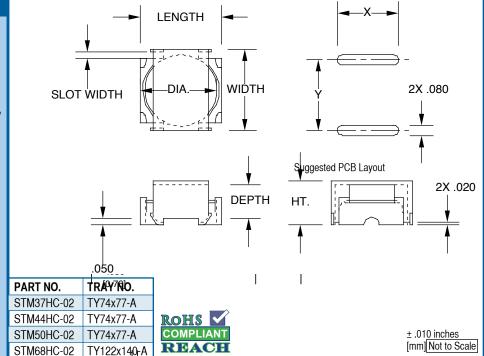

PART NO.	LENGTH	WIDTH	HT.	DIA.	DEPTH	ŚĽŎŤ WIDTH	Х	Υ	WIRE SIZE
STM37HC-02	.600 [15.2]	.585 [14.8]	.320 [8.1]	.500 [12.7]	.240 [6.1]	.045 [1.1]	.440 [11.2]	.500 [12.7]	#22 to #18
STM44HC-02	.650 [16.5]	.650 [16.5]	.360 [9.1]	.580 [14.7]	[280 [7:1]	.047[1.1]	490 [12.4]	.570 [14.5]	#22 to #18
STM50HC-02	.720 [18.3]	.720 [18.3]	.360 [9.1]	.650 [16.4]	.280 [7.1]	.045 [1.1]	.560 [14.2]	.640 [16.2]	#22 to #18
STM68HC-02	.920 [23.4]	.920 [23.4]	.355 [9.0]	.840 [21.3]	275 [7 .0]	0] 5_[1.4]	.89 9 00 [17.8]	.830 [21.1]	#20 to #16



Request samples and literature and have them ship to you same day. www.lodestonepacific.com/samplepricing.php



Search for a part to match your applications, download the .pdf www.lodestonepacific.com/selectoroid.php

Check Inventory

View daily updated inventory levels in USA and Hong Kong warehouses. www.lodestonepacific.com/search.php



Search for REACH documents, view or download the certifications .pdf. www.lodestonepacific.com/reach.php



Request a quote and delivery and have it e-mailed to you same day. www.lodestonepacific.com/quote.php



Search our Coil Winder Data Base, for capabilities to match your specs. .www.lodestonepacific.com/coilwinders.php